



TEMP17-100



TEMP17-150

Budget-Friendly Temporary Site Lighting



PROJECT: _____

DATE: _____

TYPE: _____

PREPARED BY: _____



KEY FEATURES

- **Impact resistant**, can handle demanding construction site environments
- Omnidirectional light distribution
- Lightweight design with high output
- **US cord+plug, linkable up to 600W Max**
- **IP64** wet location rated
- **4kV** surge protection
- **30,000-Hour** lifespan
- **120V** Driver
- **3-Year, Limited Warranty**

PERFORMANCE

Catalog Number	Equivalency	Input Wattage	Lumen	Cord Length	Efficacy lm/W	Color Temperature	CRI	L70 Lifespan
TEMP17-100	250W HID	400W	12,000	6'	120	5000K	80	50,000
TEMP17-150	400W HID	600W	18,000	6'	120	5000K	80	50,000

TECHNICAL SPECIFICATIONS

CONSTRUCTION

Product Type

LED Temporary Site Lighting

Housing Material

UV Resistant polycarbonate construction is impact resistant

Enclosure Finish

Construction Orange

Daisy Chain

Each LED light unit can be daisy chained together
 100W up to 6 Units
 150W up to 4 Units
 600W maximum run

Mounting

Steel carabiner included

Cord & Plug

US NEMA 5-15 Plug & Receptacle
 18/3 SJTW Cord, 6ft Length

Light Distribution

360° Light distribution is perfect for overhead temporary site lighting applications

Cage Material

Polycarbonate cage protects 360° LEDs from potential drop impact.

TECHNICAL SPECIFICATIONS (CONT.)

COMPLIANCE

Safety Listing

UL listed, UL classified

Environment/Fixture Rating

Damp location rated

FCC

Complies with Part 15 of the FCC Rules.

RoHS

Mercury and UV free. RoHS-compliant components.

IP Rating

IP64

ELECTRICAL

THD

<20%

Surge Protection

4kV

Power Factor

>0.9

Input Voltage

120V Driver

Operating Frequency

60Hz

Operating Temperature

-22°F to 140°F (-30°C to 60°C)

Note

All values are typical (tolerance +/- 10%)

OTHER

Warranty


RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

DIMENSIONS


TEMP17 100W

Weight: 3.81 lbs

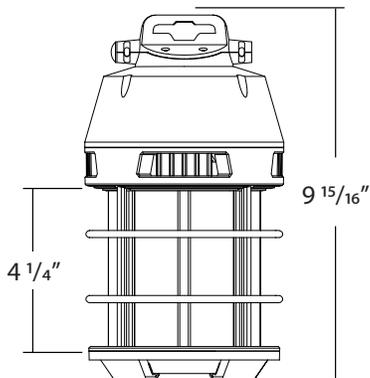

TEMP17 150W

Weight: 5.04 lbs

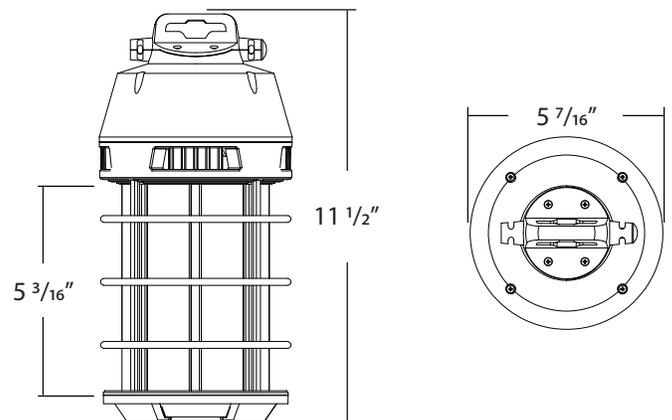

ORDERING INFO

Catalog Number	Model Number (DLC/Energy Star)	UPC	Case Pack
TEMP17-100	H20046(TEMP17-100)	192552037761	4
TEMP17-150	H20047(TEMP17-150)	192552037778	4

ORDERING MATRIX

Family	Wattage		CRI/Color Temp	Cord & Plug
TEMP17	-			
	100 150	100W 150W	Blank 80 CRI, 5000K	Blank 6 ft Cord and Plug