



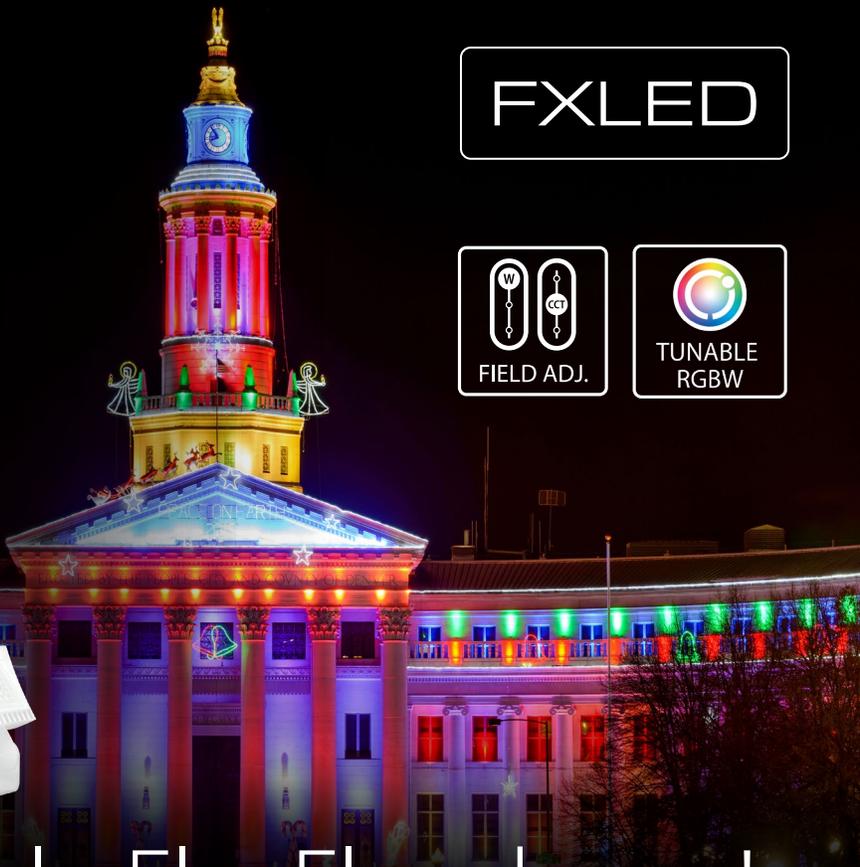

FXLED



# The most flexible FlexFlood ever!

## FXLED—Now with tunable RGBW.

### The most flexible FlexFlood ever.

The FXLED just got an upgrade that maximizes versatility both on the shelf and in the field: 4 sizes, 11 wattages, 2 mounting options, and 3 CCTs.



All sizes are compatible with both Trunnion and Slipfitter Mounts

### Optics options put the light where you need it.

Standard models come with either a 6H x 6V (XS & S) or 7H x 6V (M & L) distribution, but the medium and large models are now also available with either 3H x 3V or 5H x 5V NEMA types, giving you added flexibility with your outdoor applications!





FEATURE PAGE



RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty)

## Lightcloud®

### Color your world.

Our most flexible floodlight now delivers endless color possibilities with tunable RGBW technology. Perfect for building façades and large-scale architectural applications, use the Lightcloud Blue app to create vibrant displays and match any brand palette with the spec-grade FXLED.

## Ultra efficient.

With a super-high efficacy of up to 152 lm/W, the FXLED can save up to 75% in energy costs.

## Smaller size means smaller carbon footprint.

The new FXLED is far lighter and smaller than our original series—less than half the size! It also weighs significantly less, making it a much more sustainable, eco-friendly product. Less materials, less packaging, less energy to manufacture, less cargo space, less fuel to transport...it all adds up!

## Stay in control.

The FXLED is available with a 7-pin receptacle that's perfect for use with RAB's standard twistlock photocell or our smart, Lightcloud-enabled twistlock photocell:

Standard Twistlock (120-277V): **R-3P-PCT**  
 Standard Twistlock (480V): **R-3P-PCT**  
 Lightcloud-Enabled Twistlock\*: **LCTWIST/K**

*\*120-277V; requires Lightcloud Gateway or Hub*

## Ordering Matrix

Family	Size / Selectable Wattage	Color Temperature	NEMA Type	Mounting	Finish	Driver**	Controls
<b>FXLED</b>							
<b>XS</b>	80/60/40W	<b>Blank</b> 3000/4000/5000K CCT Adjustable	<b>Blank</b> 6H x 6V (XS & S) <sup>1</sup> or 7H x 6V (M & L) <sup>2</sup>	<b>SF</b> Slipfitter Trunnion	<b>Blank</b> Bronze White	<b>Blank</b> 120-277V, 0-10V Dimming, 480V, /480 0-10V Dimming	<b>Blank</b> No Option /7PR 7 Pin Receptacle
<b>S</b>	168/132/97/69W						
<b>M</b>	346/213W	<b>Blank</b> 4000/5000K CCT Adjustable	<b>B33</b> 3H x 3V (M & L) <sup>2,3</sup>				
<b>L</b>	534/445W		<b>B55</b> 5H x 5V (M & L) <sup>2,3</sup>				

<sup>1</sup> Available on extra small (XS) and small (S) sizes only  
<sup>2</sup> Available on medium (M) and large (L) sizes only  
<sup>3</sup> B33 & B55 only available in 4000/5000K CCT  
 \* 4000/500K adjustable CCT not available on 6H x 6V and 7H x 6V optics

Family	Size / Wattage	Color Temperature	NEMA Type	Mounting	Finish	Driver	RGB Color Tuning
<b>FXLED</b>	<b>L</b>						<b>/RGB</b>
<b>L</b>	340W	<b>Blank</b> 2200-400K Tunable White	<b>Blank</b> 7HX6V B55 B33	<b>SF</b> Slipfitter Trunnion	<b>Blank</b> Bronze	<b>Blank</b> 120-277V	<b>/RGB</b> 16+ Million RGB colors