

CCT-Adjustable DISK17



4" & 6", CCT-Adjustable, 120V,
TRIAC Dimmable



PROJECT: _____

DATE: _____

TYPE: _____

PREPARED BY: _____



KEY FEATURES

- Ultra low-profile, back-lit design made of durable thermoplastic with frosted lens
- 5 selectable color temperatures in each fixture (2700/3000/3500/4000/5000K)
- Easy surface mount installation with included keyholes and compatible with 3/0 & 4/0 junction boxes
- Designed and Certified to Comply with NEC Sec. 410.16 (A)(1) and 410.16 (C1) for Installation in Closet Storage Space
- Wet Location, Title 24, & Energystar rated, 5-year warranty
- Packaged in bulk case quantities of 12

PERFORMANCE

Catalog Number	Size	Trim Style	Wattage Equivalency	Input Wattage	Lumens	Efficacy (lm/W)	Dim Type	Input Voltage	Beam Angle	Color Temperature	CRI	L70 Lifespan	Environment	Energy Star ID
DISK17-4/BP	4"	Smooth	60W Incandescent	7W	600 lm	86	TRIAC/ELV	120V	90°	Field adjustable via dip switch 2700/3000/3500/4000/5000K	90	50,000 hrs	Wet	3999335
DISK17-6/BP	6"		75W Incandescent	10W	900 lm	90								3999336

4" DISK17

Catalog Number	Wattage	Color Temperature (CCT)	Lumens (lm)	Efficacy (lm/W)	Equivalency
DISK17-4/BP	7W	2700K	597	91.7	60W Incandescent
		3000K	624	95.4	
		3500K	663	99.7	
		4000K	657	99.9	
		5000K	641	98.5	

6" DISK17

Catalog Number	Wattage	Color Temperature (CCT)	Lumens (lm)	Efficacy (lm/W)	Equivalency
DISK17-6/BP	10W	2700K	892	93.2	75W Incandescent
		3000K	912	95.2	
		3500K	958	98.5	
		4000K	947	98.2	
		5000K	946	98.5	

TECHNICAL SPECIFICATIONS

CONSTRUCTION

Product Type
Disk

Size
4", 6"

Shape
Round

Trim Style
Smooth

Enclosure Material
Polycarbonate UV resistant housing

Finish
White - Decorative color overlays available (sold separately)

Lens Finish
Twist-lock lens makes it easy to remove and attach during installation with UV resistant polycarbonate diffuser

ELECTRICAL

Dimmable
Yes, dimmable down to 10% on compatible TRIAC/ELV dimming systems. See Dimmer Compatibility List.

Driver
Constant Current, 120V, 60 Hz; @ 120V: 60 mA

Input Voltage
120V

Operating Frequency
60 Hz

Operating Temperature
-4°F to 104°F (-20°C to 40°C)

Power Factor
0.9

Flicker
<30%

LED CHARACTERISTICS

Beam Angle
90°

Color Temperature
Field adjustable via dip switch 2700/3000/3500/4000/5000K

Color Accuracy (CRI)
90

R9 Value
High color performance with R9 greater than 50

Color Consistency
<4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

COMPLIANCE

Listings
UL Listed

Environment
Suitable for use indoors and outdoors in dry, damp, or wet environments.

IC Rated
No

Air Tight
No

Energy Star Approved
This product is ENERGY STAR® Certified.

California Title 24 JA8 Compliant
Can be used to conform with the requirements of California Title 24 Part 6.

California Energy Commission (CEC) Status
Lawful for Sales in California

NEC Compliant
Suitable for use in closets. Compliant with NEC Sec. 410.16 (A)(1) and 410.16 (C1).

IESNA LM-79 & LM80 Testing
RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

RoHS
Mercury and UV free. RoHS-compliant components.

FCC
Complies with Part 15 of the FCC Rules


WARRANTY

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at

DIMENSIONS


4" DISK17

Weight .26lbs

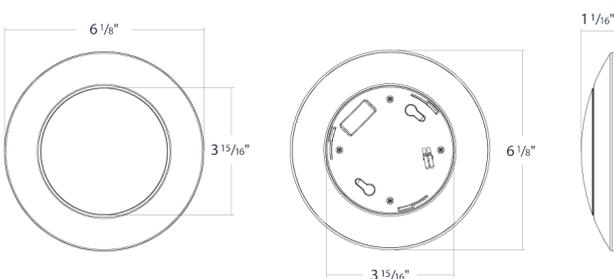

6" DISK17

Weight .39lbs

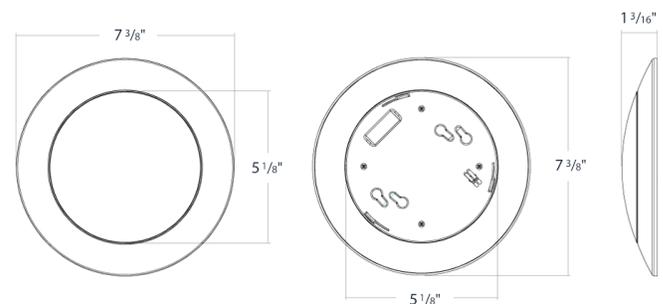

ACCESSORIES



Catalog Number	UPC	Description
DSKFA4/PIR/ACC	192552018975	Mounting hardware
DSKFA6/PIR/ACC	192552018982	Mounting hardware
DISK34-TRIM-4-BRZ	192552040020	4" Round Bronze Trim
DISK34-TRIM-4-BN	192552040013	4" Round Brushed Nickel Trim
DISK34-TRIM-4-BLK	192552040006	4" Round Black Trim
DISK34-TRIM-6-BRZ	192552040051	6" Round Bronze Trim
DISK34-TRIM-6-BN	192552040044	6" Round Brushed Nickel Trim
DISK34-TRIM-6-BLK	192552040037	6" Round Black Trim

ORDERING INFO

Catalog Number	Model Number	UPC	Case Pack
DISK17-4/BP	DLS0190(DISK17-4/BP)	192552045889	12
DISK17-6/BP	DLS0191(DISK17-6/BP)	192552045896	12

ORDERING MATRIX

Family	Size/Wattage	Shape	CRI/Color Temp	Driver	Finish	Options
DISK17	-					/BP
	4 4"/9W 6 6"/10W	Blank Round	Blank 90CRI, 2700/3000/3500/4000/5000K CCT Adjustable	Blank 120V, TRIAC/ELV	Blank White	/BP Bulk 12-Pack

CCT-Adjustable DISK17



Dimmer Compatibility List

DISK17-4/BP

DISK17-6/BP

Visit www.rablighting.com for periodic updates to this list or contact us at 888-722-1000 for questions or comments.

Dimmers			Lamp Quantities				Dimming Level
Dimmer Brand	Series	Dimmer Model	1	4	8	10	
LUTRON	Maestro C-L	MACL-153M	✓	✓	✓	✓	10-100%
LUTRON	Skylark C-L	SCL-153P	✓	✓	✓	✓	10-100%
LEVITON	Sureslide	Cat.NO.6674	✓	✓	✓	✓	10-100%
LUTRON	Diva C-L	DVCL-153P	✓	✓	✓	✓	10-100%
LUTRON	Skylark	CTCL-153PDH-WH	✓	✓	✓	✓	10-100%
LUTRON	Toggler	TGCL-153PH-WH	✓	✓	✓	✓	10-100%
LUTRON	Diva C-L	DVWCL-153PH-WH	✓	✓	✓	✓	10-100%
RAB		XDIM	✓	✓	✓	✓	10-100%